SIENI PIER 3 1 1 1 1 1 1



Features of Super Auto 150 -

- 1 The machine performance greatly improves to twice faster than the conventional models.
- 2 The super multi-purpose power unit has an ultra-low noise engine with 200-horsepower. The engine revolutions can be switched to 3 modes to adapt various ground conditions and surrounding conditions.
- ③ The new automatic operating system can control press-in and extraction operations by setting press-in force, press-in stroke and extraction stroke for the most efficient performance at each ground condition.
- 4 Stability and reliability of the machine have greatly improved by the self-inspection function.





Specifications of SA150


	o o i i o a ti o i i o	
Silent Piler	Max. Press-in Force	150 tons
	Max. Extraction Force	160 tons
	Stroke	850 mm
	Press-in Speed	1.0 to 23.2 m/min
	Extraction Speed	2.1 to 18.2 m/min
	Applicable sheet piles	JSP (400 mm width) Type II, III, IV
	Control System	Radio Control
	Movement	Self-Moving
	Length	2060 mm
	Width	1000 mm
	Height	2580 mm
	Mass	7740 kg
Power Unit	Power Source	Diesel Engine (with Turbo)
	Rated Output	200 PS / 1800 rpm
	Fuel Tank Capacity	350 L
	Hydraulic Oil Tank Capacity	550 L
	Length	4150 mm (**)
	Width	1705 mm (**)
	Height	2350 mm (**)
	Mass (*)	3900 kg
	Total Mass (*)	5500 kg (**)
Crawler	Control System	Cable Control
	Mobile Source	2 hydraulic pumps & 2 hydraulic motors (Diverged from the Power Unit)
	Mobile Speed	1.4km/h
	Mass	1,000kg
Reaction Stand	Туре	Arm Type
	Length	3380 mm
	Width	1770 mm
	Height	470 mm
Re	Mass	1700 kg


^{*} Including 20m long hydraulic hoses, full fuel & rating volume of hydraulic oil

■ Multi-Box

The necessary tools for sheet piling works are stored compactly. A direct current welding machine: output electric current 50A-180A (Duty Cycle 40%). φ4 mm welding rod can be used. Gas cutting gear

Standard maintenance tools Mass: 600kg (No gas cylinder)

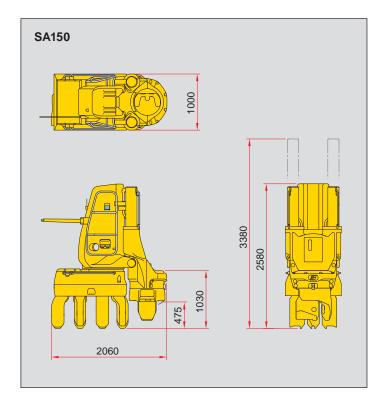

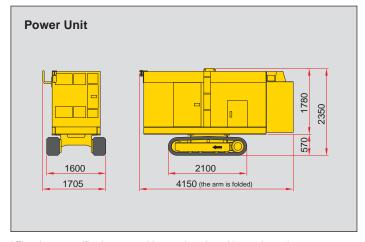

^{*} The above specifications are subject to alteration without prior notice.



www.giken.com

GIKEN LTD.

Global Network: Japan, UK, Germany, USA, Singapore, China

International Business Department

3948-1 Nunoshida, Kochi-shi, Kochi 781-5195, Japan Tel.: +81-(0)88-846-2980 Fax: +81-(0)88-826-5288

Email: international@giken.com

For more contact information, please visit: http://www.giken.com/en/contactus/groupcompanies

^{**} With Multi-Box & the Crawler